


## Data Sheet

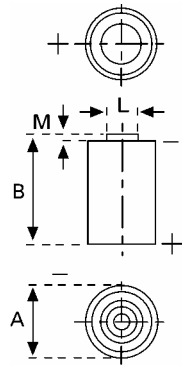

**Type Number** ..... 6238  
**Designation IEC** ..... ---  
**System** ..... Li-Manganese dioxide / Organic Electrolyte

**UL Recognition:**..... MH 13654 (N)  
**Nominal Voltage** ..... 3 V  
**Typical Capacity C** ..... 1350 mAh  
 Load 1.0 kOhm, at 20°C down to 2 V

**Weight (approx.)** ..... 17 g  
**Volume** ..... 7 ccm  
**Coding**..... Date of Manufacturing Quarter/Year

**Temperature Ranges**

	min	max.
Storage	-55°C	75 °C
Discharge	-30°C	75°C

**Dimensions**

	min	max.
Diameter (A)	16,5	17
Height (B)	33,1	33,5
Shoulder Diameter[L]	7	
Shoulder Height [M]	0,4	

**Segment** ..... Electronic

**Main Applications** ..... Electronic

### Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage:	2.0 V
Continuous 24h/d,7d/w Current [µA]:	1000 Ω	Time: Capacity [mAh]: Energy [MWh]:	500 h 1350 3600

All Data contained herein is for single cells

For battery applications, performance data may vary from single cell data, depending on specific battery configuration