


Data Sheet

| | | |
|----------------------------------|--|-------------|
| Type Number: | 55604 | |
| Sytem: | Nickel Metal Hydride/ KOH Electrolyte | |
| Nominal Voltage [V]: | 1.2 | |
| Nominal Capacity C [mAh]: | 40 | |
| Typical Capacity C [mAh]: | 43 | |
| | at 8 mA / 1.00 V | |
| Weight, approx. [g] | 1.7 | |
| Dimensions [mm]: | min. | max. |
| Diameter [d]: | 11.3 | 11.5 |
| Height [h]: | 5.05 | 5.35 |

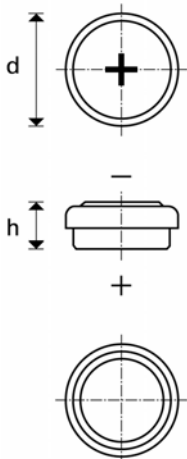

| | | |
|------------------------|---|--|
| UL Recognition: | MH 13654 (N) | |
| Coding: | Manufacturing 5 digit code (123 = day/4 = year/ 5 = version) | |

| | | |
|-----------------------------------|-------------|-------------|
| Temperature Ranges [°C] | min. | max. |
| Storage: less than 30 days | -40 | 65 |
| Discharge: | -20 | 65 |
| Charge: | 0 | 65 |

| | |
|-------------------------------------|--|
| Charging Method: | |
| Normal Charging: | 4 mA for 14 – 16 h |
| Accelerated Charging (20°C): | 8 mA for 7-8 h |
| Fast Charging: | 20 mA for 3 h * |
| | Time controlled, voltage control recommended |
| Trickle Charging: | 1.2 mA |

| | |
|---------------------------|-------------------|
| Overcharge (20°C): | 4 mA continuous |
| | 8 mA up to 1 year |

| | |
|--------------------------------------|--|
| Charge Retention [%] at 20°C: | 90 |
| | Capacity available after 1 month Storage at 20°C |

| | |
|-----------------------------------|--|
| Internal Resistance [Ohm]: | 3 |
| | at charged cells, 20°C, DC: 0.2 CA/2 CA, (IEC 61951-2) |

| | |
|-------------------------|---|
| Impedance [Ohm]: | 0.42 |
| | at charged cells, 20°C, AC: 1kHz, (IEC 61951-2) |

| | |
|----------------------------------|-------------------|
| Typical Capacities [mAh]: | |
| | at 40 mA / 0.90 V |
| | 23 |

| | |
|---|----|
| Max. Discharge Current (cont.) [mA]: | 80 |
|---|----|

| | |
|-----------------------------------|----------------------|
| Life Expectancy (typical): | |
| IEC Cycle: | 1000 Cycles |
| Trickle Charge: | up to 6 years (20°C) |
| Trickle Charge: | up to 3 years (45°C) |

* for fully discharged cells, 20 °C
Capacities based on normal charging