

Keyword:
Enhanced Start

Type: SL-786


Performance Data **Size 1/6D**
 (Typical values for batteries stored at 25°C for one year)

System	Li/SOCl ₂
Nominal voltage	3.6 V
Nominal capacity	1.6 Ah
Nominal current	1 mA
Max. continuous discharge current	10 mA
Pulse current capability	20 mA
Anode surface area	7.5 cm ²
Weight	22 g
Volume	8.2 cm ³
Temperature range	-55...+75 °C


WARNING:
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.

See page 4 for further safety recommendations.


Typical Discharge Curves at +25°C

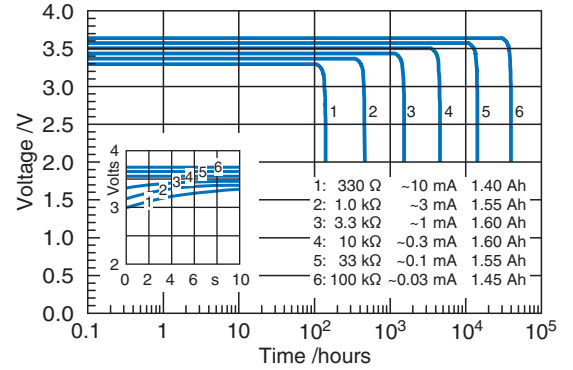


Available Capacity

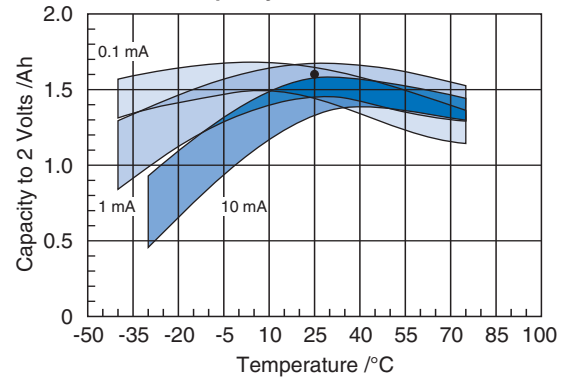

Operating Voltage

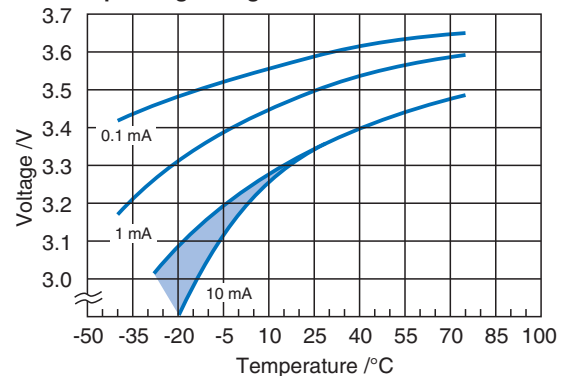

SL-786

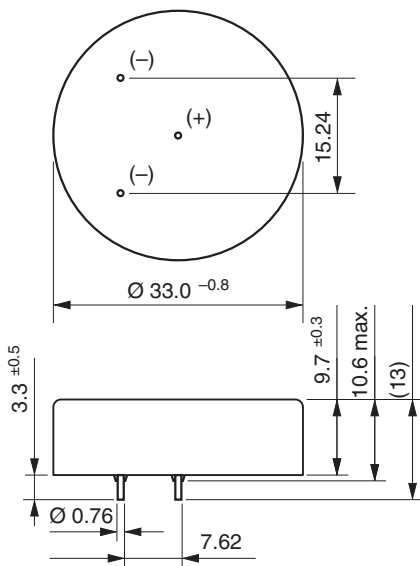

Available Terminations

SL-786 Pins

Catalogue No.

11 1 17864 00

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.