

**Keyword:**  
**Enhanced Start**

**Type:** **SL-789**


**Performance Data** **Size 1/4D**  
 (Typical values for batteries stored at 25°C for one year)

System	Li/SOCl <sub>2</sub>
Nominal voltage	3.6 V
Nominal capacity	0.95 Ah
Nominal current	1 mA
Max. continuous discharge current	10 mA
Pulse current capability	20 mA
Anode surface area	7.5 cm <sup>2</sup>
Weight	17 g
Volume	5 cm <sup>3</sup>
Temperature range	-55...+75 °C


**WARNING:**  
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.

See page 4 for further safety recommendations.


**Typical Discharge Curves at +25°C**

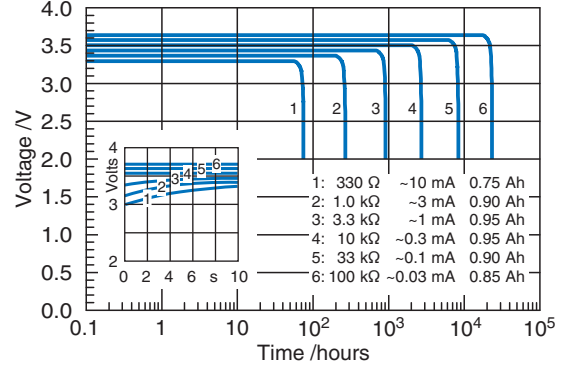


**SL-789**

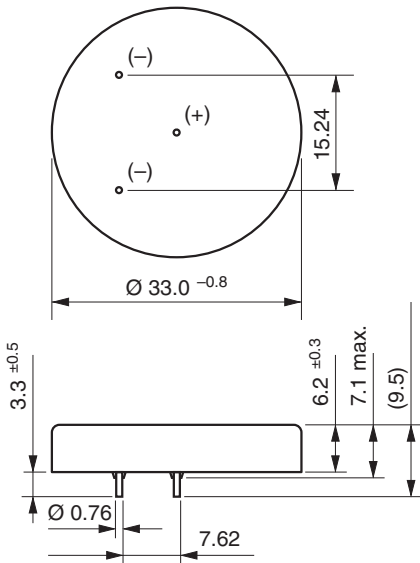

**Available Capacity**

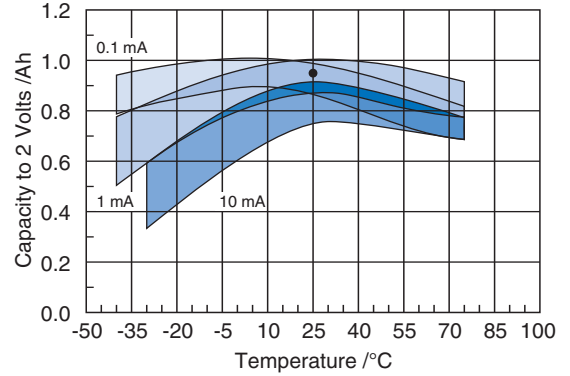

**Operating Voltage**

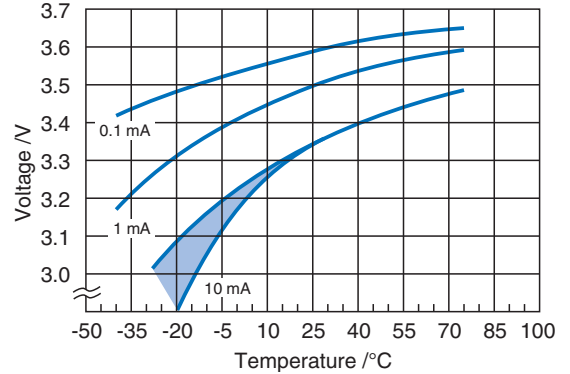

**Available Terminations** **Catalogue No.**

SL-789 Pins

11 1 17894 00

*Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.*