

Keyword:
Enhanced Start

Type: **SL-790**



Performance Data (Typical values for batteries stored at 25°C for one year) **Size DD**

System	Li/SOCl ₂
Nominal voltage	3.6 V
Nominal capacity	35 Ah
Nominal current	10 mA
Max. continuous discharge current	300 mA
Pulse current capability	900 mA
Anode surface area	90 cm ²
Weight	195 g
Volume	100 cm ³
Temperature range	-55...+85 °C


WARNING:
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.

See page 4 for further safety recommendations.


Typical Discharge Curves at +25°C

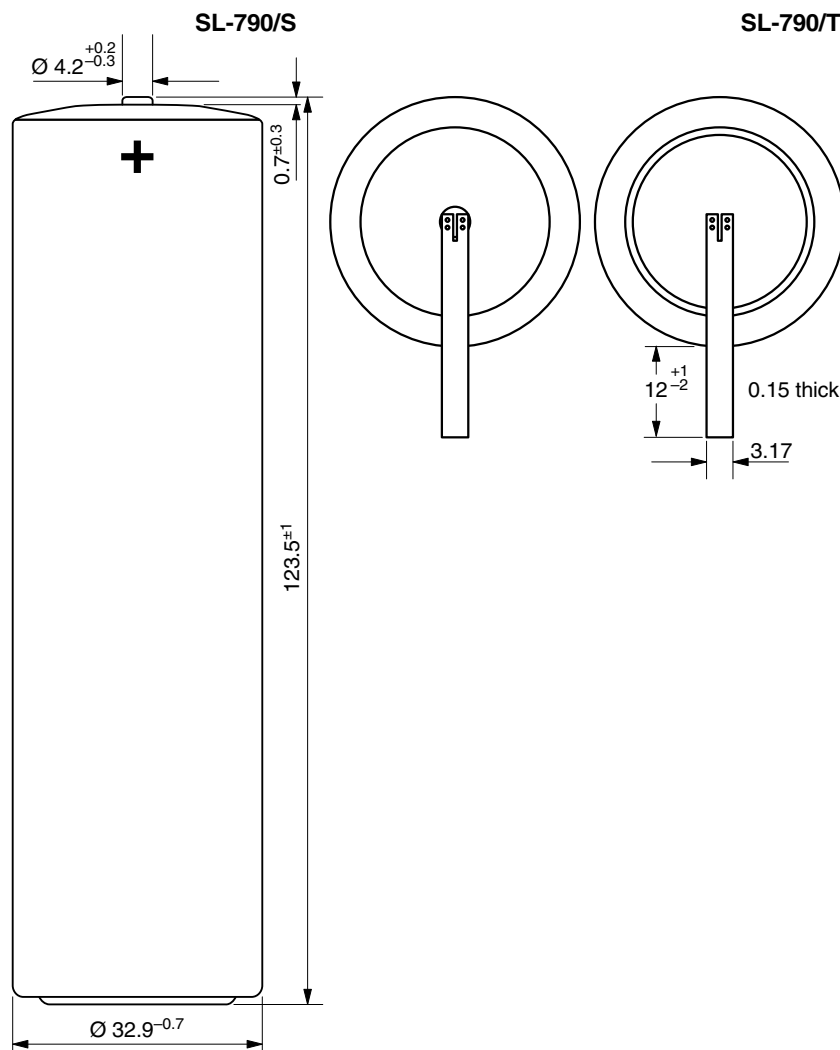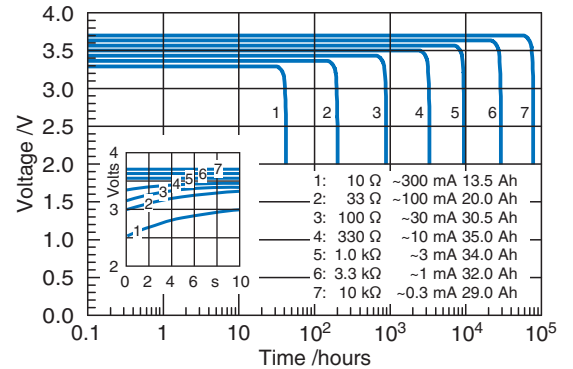


Available Capacity

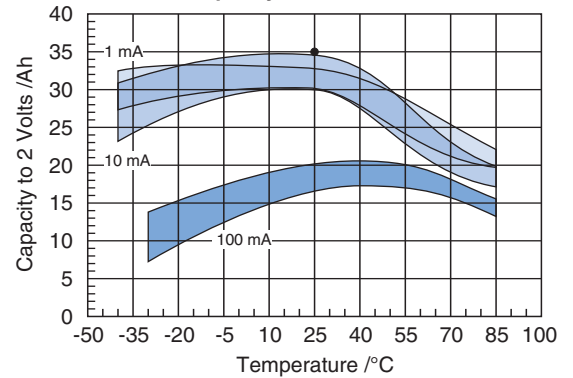

Operating Voltage

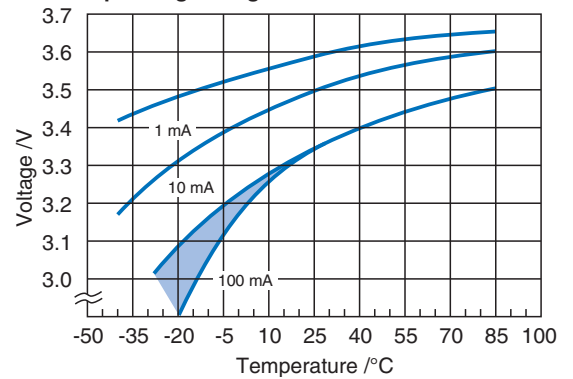

Pulse Discharge Characteristics at +25°C

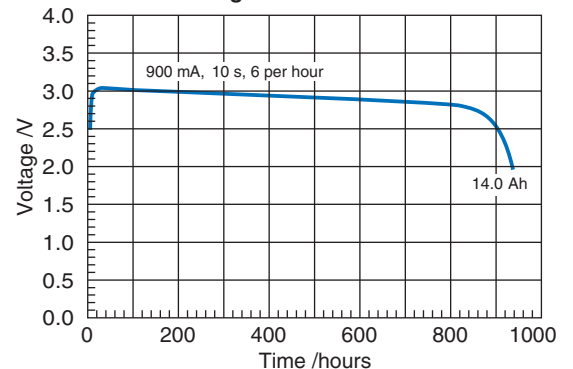

Available Terminations

SL-790/S	Standard
SL-790/T	Tags

Catalogue No.

11 1 17901 00
11 1 17902 00

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.