

# MODEL TL-2450


International size reference: ER24G50

## TECHNICAL DATA




(Typical values @+25°C for batteries stored for one year or less)

■ Nominal capacity @ 0.1 mA, to 2V	0.50 Ah
■ Rated voltage	3.6 V
■ Maximum recommended continuous current	5 mA
■ Maximum 1 sec. pulse capability	10 mA
■ Weight	8.8g (0.310 oz)
■ Volume	2.60 cc
■ Operating temperature range	-55°C to +85°C
■ U.L. Component Recognition MH 12193	

# TADIRAN LITHIUM BATTERIES

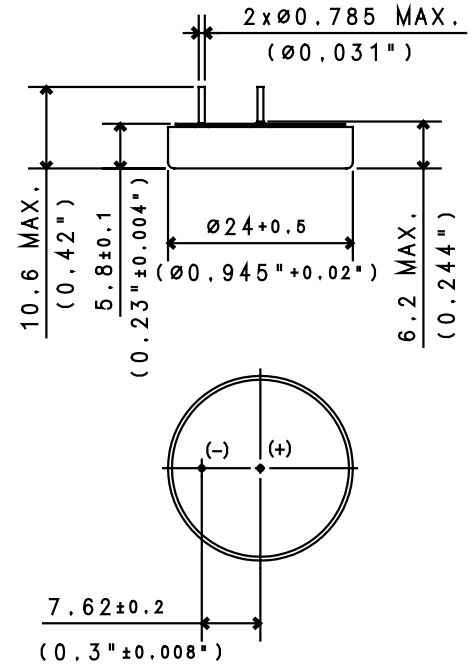

**ADDITIONAL INFORMATION**  
 SUFFIX- /P TIN PLATED NICKEL PINS  
 CATALOGUE NO.: 15-2450-41000

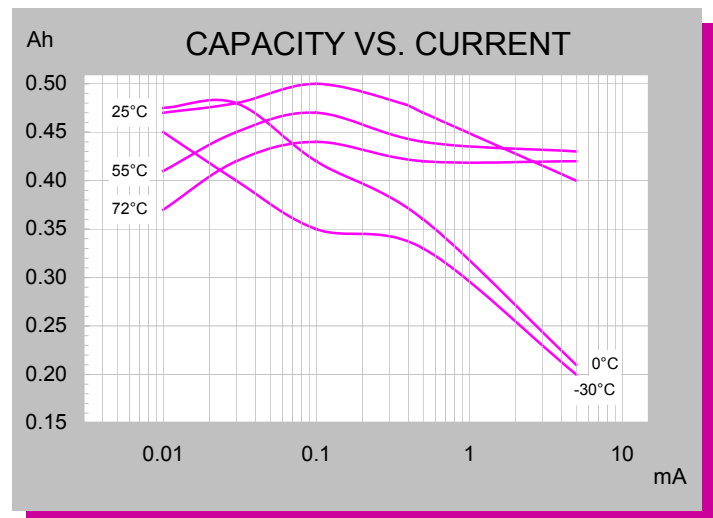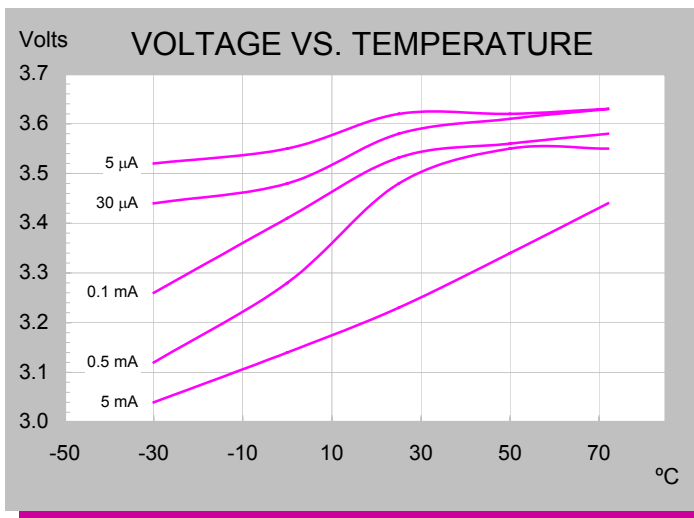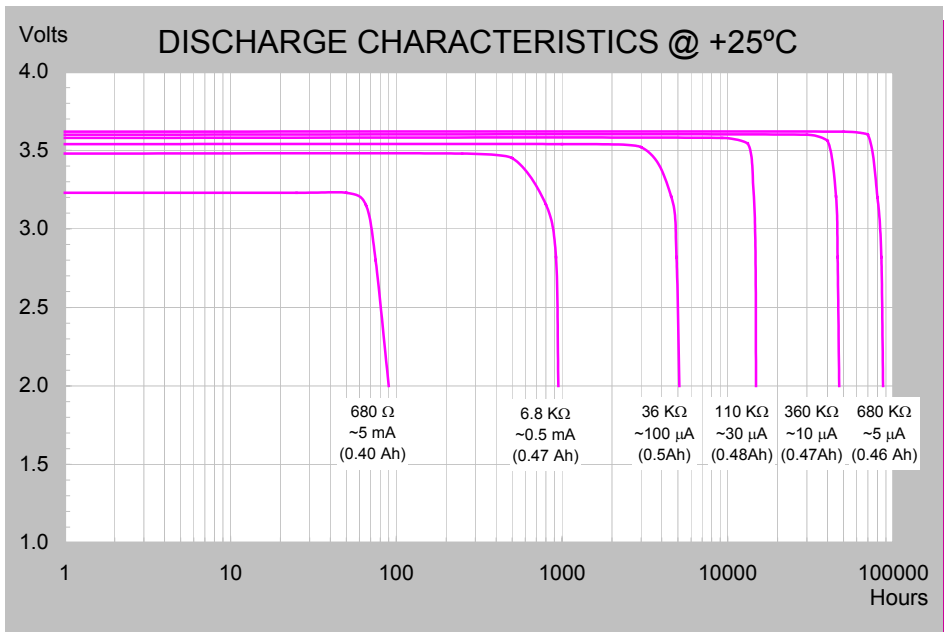

## XOL - Extended Operating Life

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. Rev. C 03/05