

MODEL TL-4986



International size reference: ER22G75

TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)




| | |
|--|-----------------|
| ■ Nominal capacity @ 0.5 mA, to 2V | 0.42 Ah |
| ■ Rated voltage | 3.6 V |
| ■ Maximum recommended continuous current | 5 mA |
| ■ Maximum 1 sec. pulse capability | 10 mA |
| ■ Weight | 5.7g (0.201 oz) |
| ■ Volume | 1.35 cc |
| ■ Operating temperature range | -55°C to +85°C |
| ■ U.L. Component Recognition MH 12193 | |

TADIRAN LITHIUM BATTERIES

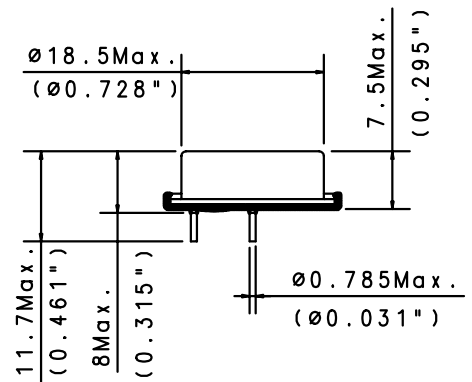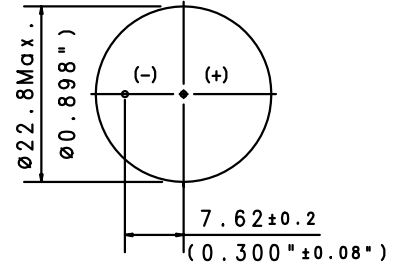

ADDITIONAL INFORMATION

SUFFIX - /P TIN PLATED NICKEL PINS
 CATALOGUE NO.: 15-4986-43000

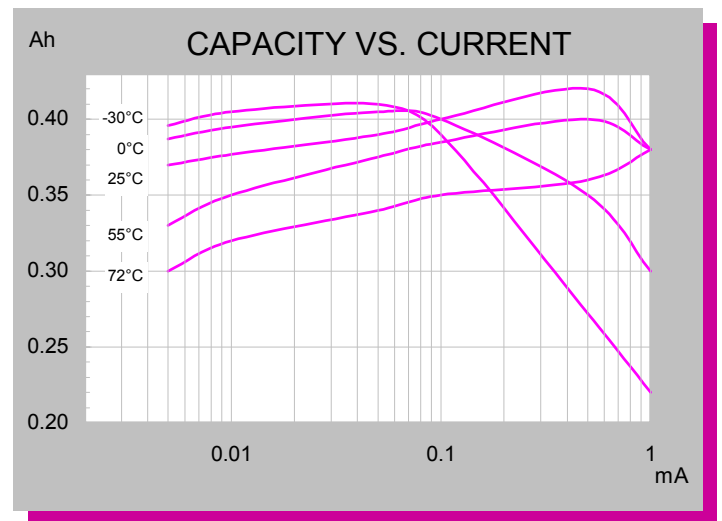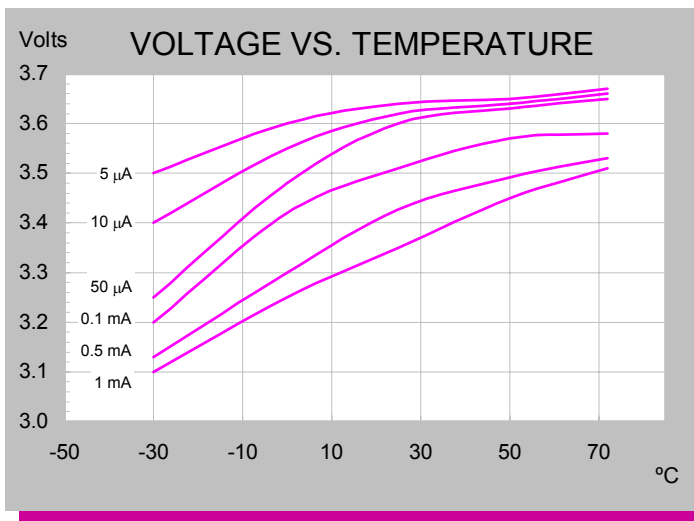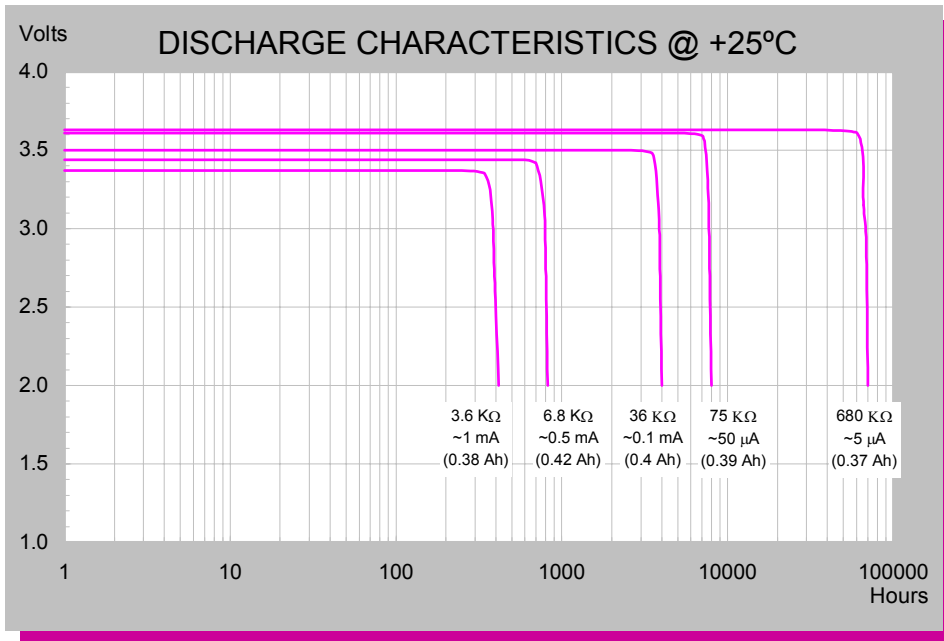

XOL - Extended Operating Life

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. Rev. D 05/03